



PHOTONICS SOLUTIONS
LASERS & DETECTORS covering UV to IR

PRECISELY DESIGNED
and tailored to your application


FOR YOU
to be successful

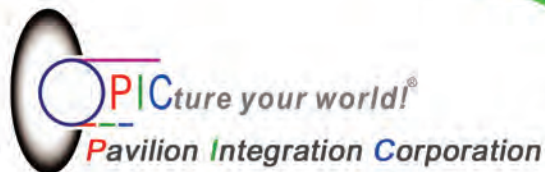


Flow Cytometry




DNA Sequencing




Confocal Microscopy




Ophthalmology




Spatial Omics



Raman Spectroscopy



Lightsheet Imaging



Optogenetics

For Biomedical & Sensing Applications
Lasers | Detectors | OEM Engines

Solid-State Photonic Solutions for Biomedical Instrumentation
©Pavilion Integration Corporation

Pavilion Vision

Pavilion Integration Corporation (**PIC**), founded in 2002, is a Delaware registered Corporation with headquarters in Reno, Nevada, and San Jose, California, with global operation sites in Munich and Suzhou. The Reno site and Suzhou site comprise R&D, applications, production operation, and quality teams. PIC manufactures free space and fiber coupled lasers, detectors, and multi-laser modules, and completed optical subsystems covering the UV, Visible and IR wavelength ranges for demanding biomedical and sensing industries. We chose the name Pavilion Integration Corporation for our company envisioning a place that allows us (customer and vendor) to openly discuss in mutual trust, and to work out leading edge breakthrough solutions that will enter the marketplace in disruptive ways to literally light the darkness on disease and discovery.

PIC's Photonic Integration Division works closely with customers on higher level customized integrated modules and optical subsystem assemblies. The PIC Photonic Integration Division has customer dedicated teams in Munich, Reno, San Jose, and Suzhou. PIC is ISO9001/13485 certified and GMP for medical device manufacturing.


Bring Your Applications to the Next Level of Reliability & Performance

Quality & Reliability


- » ISO9001/13485 since 2009
- » Laser Lifetime >30,000 hours
- » History of over 155,000 units shipped

Performance




- » Low Noise
- » Low Coherence
- » Low Speckle
- » Mode-hop Free
- » Back Reflection Protection
- » Excellent Beam Pointing Stability
- » Stability over Temperature and Humidity



Low Noise

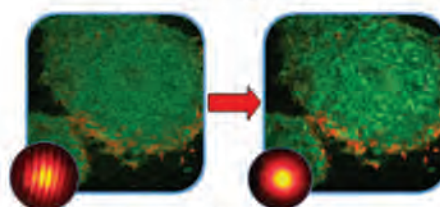

Low Coherence

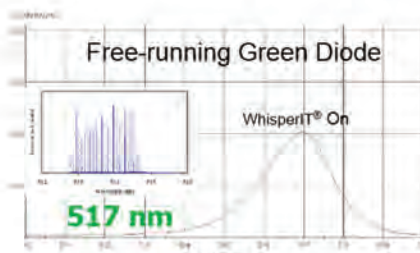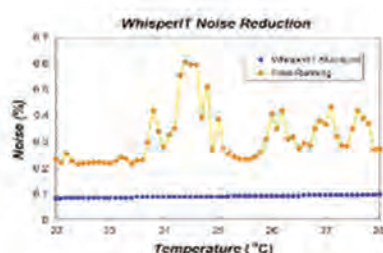

Product Pyramid

Higher Value Vertical Integrated Solutions

Higher Volume Standard Product

BASOE® Photoelectric Complete Solution



Shiva® Multi-Laser Platform



Lapis® Optical Engine



Lapis® High Power Optical Engine



WhisperIT Comet® Single-Ch. Detector



QWDM® Multi-Ch. Detector


WhisperIT® Single Laser Free Space and Fiber Delivered Output

WhisperIT® Single Laser Series: Free Space

The lasers utilize the patented WhisperIT® technology that guarantees the laser output with mode-hop free, low noise, low speckle, superior stable output power operation and back reflection protection, under all operating conditions, while provides the custom-specific beam shape and beam delivery, at a substantially reduced cost, consistency, compact footprint and dramatically reduced power consumption compared to conventional gas and DPSS lasers.

Single-Laser Free Space					
Product Series	WMP	WMN	W	WCP	WSL
					
Laser Beam Output	0.7mm	0.7mm or Elliptical	0.7mm	0.7mm	0.7mm
Dimension	52*27*13mm	55*20*32mm	86*40*44mm	70*40*38mm	125*70*34mm


Broad Range of Wavelengths and Output Powers (Single-Mode Free Space)

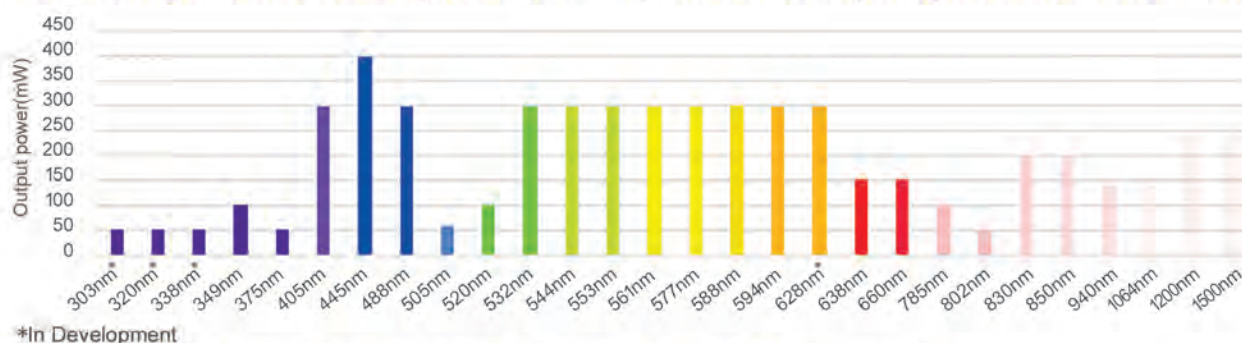

WhisperIT® Single Laser Series: Fiber Delivered

Single-Laser Fiber Delivered						
Product Series	WCP FC	WCP FCO	WSL FC	WSR	WSR FCO/BSO	Dual-collimator Fiber
						
Laser Beam Output	FC/APC	0.7/1.1/1.8/2mm	FC/APC	0.7mm	0.7/1.1/1.8/2mm	0.7mm
Dimension	70*40*38mm	70*40*38mm	125*70*34mm	125*70*34mm	125*70*34mm	1m length

Broad Range of Wavelengths and Output Powers (Single-Mode Fiber Output)

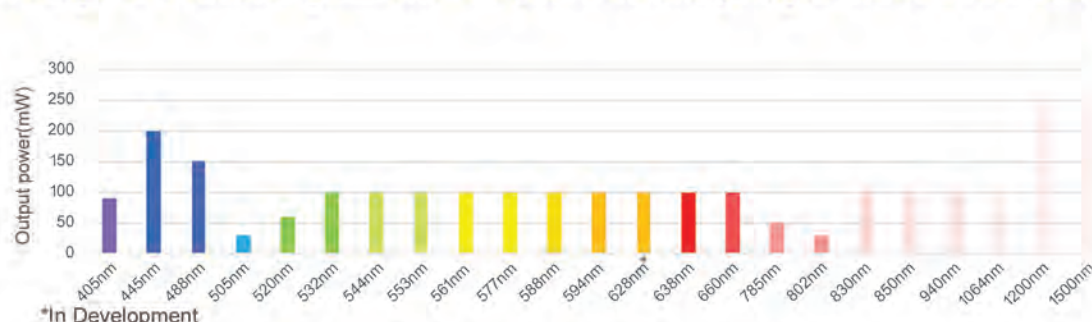


WhisperIT[®] Lapis[®] Shiva[®] Multi-Laser Series

The Lapis[®] multi-laser series single-mode laser based optical engines include integrated built-in lasers, customizable beam shaping, beam delivery, and final focus beams. Each Lapis[®] optics box undergo an extensive manufacturing process to ensure robust beam pointing stability over temperature and humidity ensuring long-life in the field.

The Shiva[®] series is a pre-aligned multi-laser platform, ideally suited for biophotonics (cytometry, fluorescence, microscopy, etc.) and medical imaging in cellular biology. These applications require a flexible laser source that provide several wavelengths from one axis output or one optical fiber. Available with up to 7 different wavelengths from UV to IR.

Single-Mode	Lapis [®] Free Space Multi-Laser		Shiva [®] Free Space Multi-Laser		Lapis [®] Fiber Delivered Multi-Laser
	2/3-laser	4-laser	4+1 laser plate	6+1 laser plate	4 in 1 FC laser
Product Series					
Laser Beam Output	Collinear or evenly spaced multi-laser beams		405nm/488nm/561nm /638nm + UV / nIR	6-laser + 1 UV / nIR laser	single-mode 405/488/561/638nm PM Fiber Output with BSO
	Focus Beam: 15±3um * 60±15um				1.2mm/1.8mm/2mm
Dimension	130*176*60mm	155*180*52.2mm	230*230*88mm	286*230*88mm	270*160*50mm

Multi-Laser Free Space Nominal Optical Performance

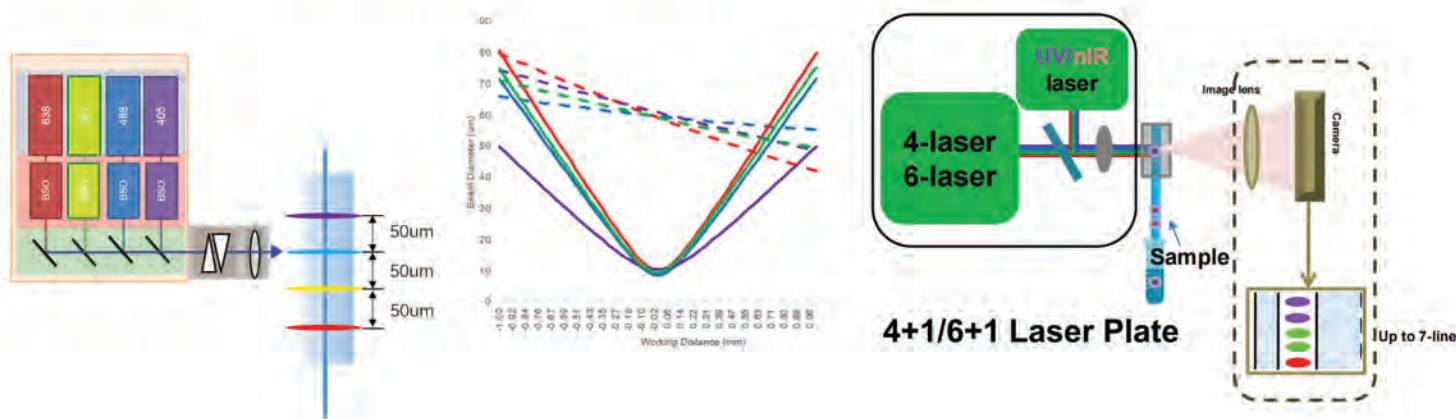


WhisperIT® Lapis® High Power Multi-Laser Series


Lapis® multi-laser of high-power multi-mode based optical engines include integrated built-in lasers, customizable multi-fiber output. Each Lapis® high power optics box undergo an extensive manufacturing process to ensure robust uniformity over temperature and humidity ensuring long-life in the field.

Multi-Mode	Lapis® High-Power Multi-Laser				
Product Series	1-laser	4/5/7/9-laser (up to 11)	Hybrid 7-Laser/LED /Bright Light	4/5/7/9-LED	Bright Light
Laser Beam Output	Power up to 5W	400um/450*150um 0.22NA	400um/800um/ 1000um 0.22/0.39NA	1500um/3000um 0.39NA	400um/800um/ 1000um 0.22/0.39NA
Rise/Fall Time	50-150us/25-50us	50-150us/25-50us	80-200us/25-200us	80-200us/25-200us	80-200us/25-200us
Dimension	130*52*32mm	340*190*250mm	340*190*250mm	360*145*240mm	125*107*57mm


Rise/Fall Time

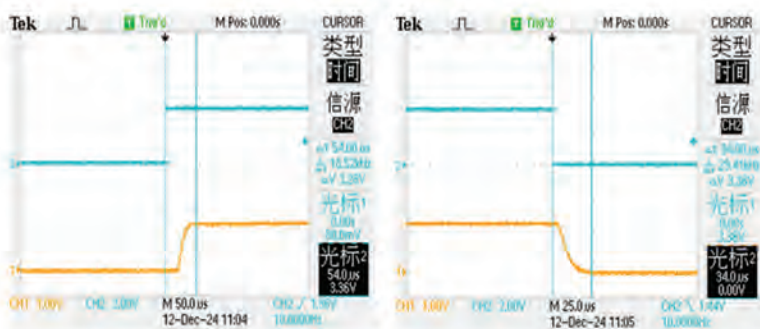

High Power Uniformity

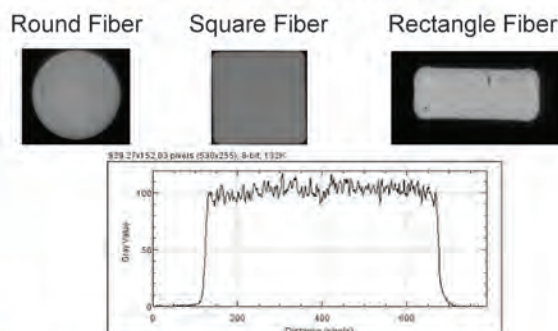

Broad Range of Wavelengths and Output Powers (Multi-Mode Laser)

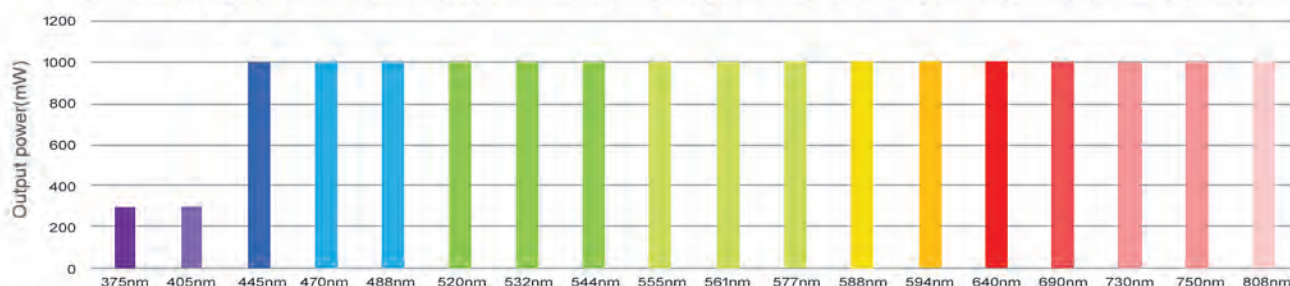

*Output power is limited by fiber. Higher output power is available upon request.

WhisperIT Comet[®] and QWDM[®] Solid-State Detectors

An ideal replacement to expensive PMTs, offering high QE, high sensitivity, low noise, large dynamic range, and compact space savings. SSDs can be TE-cooled for ultra-low light sensitivity and feature on-board pre-amplifier customizable to match customer's channel by channel system requirements. New enhanced sensitivity red-shift models with high quantum efficiency now available.

Detectors	Single-Ch. SSD	Single-Ch. SSD	Multi-Ch. SSD
	SiPM SSD	Cooled SSD	4-ch/8-ch/12-ch
Product Series			
Spectral Response Range	350-1000nm	350-1000nm	350-1000nm
Signal Output	Voltage/Current Analog	Voltage/Current Analog	Voltage/Current Analog or Digital

- High quantum efficiency
- Blue and red shifted options from 350-1000nm
- Exact form fit drop-in compatible replacement to PMT
- TE-cooled version available
- Built-in pre-amplifier
- Current or voltage output
- Multi-ch SSD standard 4, 8, up to 12-ch
- The 24, 32, 64, and 72-ch array is available upon request




BASOE[®] The Ultimate Complete Photonics Solution

The optical engine is designed with integrated excitation module, signal collection and SiPM detectors, receiving optics, filters, sample capillary or cartridge or sample flow cell.

BASOE [®] Optical Engine		
	1-laser + Spectrometer	2-laser 6/8-ch 3-laser 10/13-ch; 4-laser 20-ch
Product Series		
Dimension	L*W*H:163*73*57mm	L*W*H:400*300*100mm
Application	1 st -Gen DNA Sequencing	FCM / Multi-plexing

- Standard availability: 1-laser 4-ch for POCT specifically; 2-laser 6/8-ch; 3-laser 10/13-ch. up to 4-laser 20-ch available.
- Integrated optical engine including excitation, signal collection and detector receiving optics, filters, sample cartridge or sample flow cell.
- Collinear or evenly spaced multi laser beams at flow cell or capillary or sample cartridge.
- Integrated multi-ch detectors with digital output.

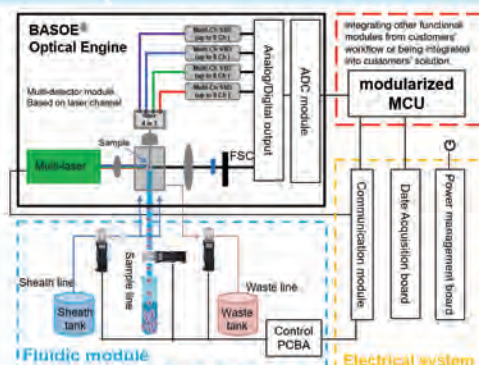

PHOTONICS SOLUTIONS


LASERS & DETECTORS covering UV to IR

PRECISELY DESIGNED

and tailored to your application

FOR YOU

to be successful

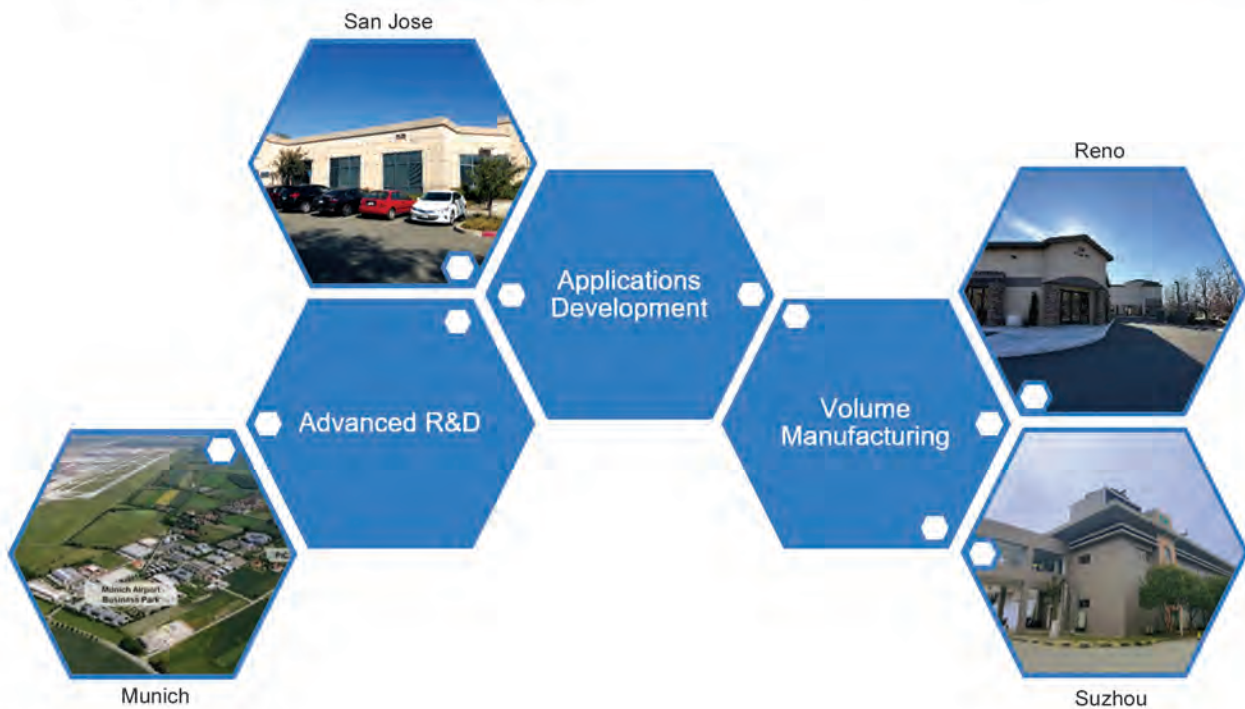

USA Corporate Headquarter

2528 Qume Drive, Suite 1,
San Jose CA 95131 U.S.A.

Tel. +1 408 453 8801

Sales Email: sales@pavilionintegration.com

USA Operational Headquarter

898 Maestro Dr, Suite 101,
Reno, NV 89511

Tel. +1 775 420 5023

Europe

Am Soeldnermoos 17
85399 Hallbergmoos, Germany
Tel. +49 178 35 98089

China

Building 22#, (North Wing),
Gangtian Industrial Park
No. 99 Gangtian Road
Suzhou Industrial Park, Suzhou City,
Jiangsu, P. R. China 215021
Tel. +86 512 62625925